

Fig. ZRJ0

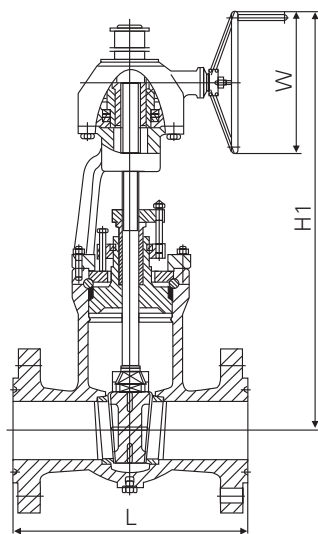


Fig. 5ZRJ0

压力等级 Pressure: CLASS 600~900

压力密封阀盖

弹性闸板

class 600, 24" 以上采用齿轮传动

class 900, 16" 以上采用齿轮传动

Pressure sealed bonnet

flexible wedge gate

class 600, 24" and above:

class 900, 16" and above:

Gear operated

» 主要外形尺寸和重量 Main Dimensions & Weight

压力 CLASS	规格 Size		阀门尺寸 Valve Dimensions						重量 Weight(kg)	
	mm	in	L(RF)	L(BW)	L(RJ)	H	H1	W	RF	BW
600	80	3	356	254	359	609	—	250	68	54
	100	4	432	305	435	762	—	350	112	84
	150	6	559	457	562	863	—	450	209	169
	200	8	660	584	664	1092	—	610	315	245
	250	10	787	711	791	1168	—	720	529	429
	300	12	838	812	841	1270	—	720	775	615
	350	14	889	889	892	1447	—	720	1210	960
	400	16	991	991	994	1651	—	860	1600	1200
	450	18	1092	1092	1095	1727	—	860	1895	1435
	500	20	1194	1194	1200	1981	—	860	2356	1794
	600	24	1397	1397	1407	—	2308	610	4300	3600
	650	26	1448	1448	1461	—	2500	610	4800	4070
	700	28	1549	1549	1562	—	2750	610	5600	4770
	750	30	1651	1651	1664	—	2840	610	6350	5410
900	800	32	1778	1778	1794	—	3150	720	7890	6840
	900	36	2083	2083	2099	—	3400	720	9112	7802
	80	3	381	305	384	584	—	350	95	77
	100	4	457	356	460	711	—	350	130	101
	150	6	610	508	613	863	—	610	280	245
	200	8	737	660	740	1016	—	610	460	341
	250	10	838	787	841	1181	—	720	820	640
	300	12	965	914	968	1320	—	720	1150	930
	350	14	1029	991	1038	1568	—	850	1500	1298
	400	16	1130	1092	1140	—	2159	760	2100	1855
	450	18	1219	1219	1232	—	2381	760	2750	2340
	500	20	1321	1321	1334	—	2451	760	3400	2800
	600	24	1549	1549	1568	—	2971	900	4400	3420
	650	26	1574	1574	—	—	3352	900	5500	4270
	700	28	1663	1663	—	—	3695	900	6900	5454
	750	30	1778	1778	—	—	4000	900	9000	7392
	800	32	1854	1854	—	—	4165	900	11000	9042
	900	36	2032	2032	—	—	4597	900	13500	10874

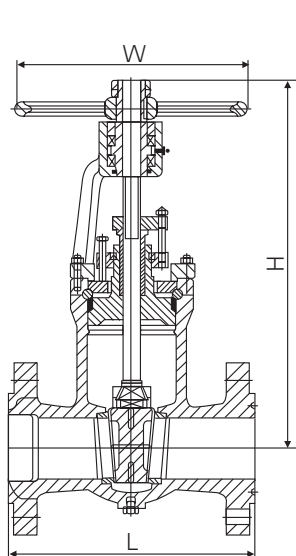


Fig.ZRJO

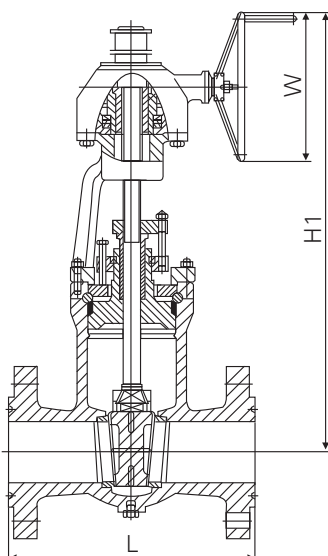


Fig.5ZRJO

压力等级Pressure:CLASS1500
~2500

压力密封阀盖
弹性闸板
class1500,12"以上采用齿轮传动
class2500,8"以上采用齿轮传动

Pressure sealed bonnet
flexible wedge gate
class1500,12"and above:
class2500,8"and above:
Gear operated

» 主要外形尺寸和重量 Main Dimensions&Weight

压力 CLASS	规格 Size		阀门尺寸 Valve Dimensions						重量 Weight(kg)	
	mm	in	L(RF)	L(BW)	L(RJ)	H	H1	W	RF	BW
1500	80	3	470	305	473	660	—	350	148	110
	100	4	546	406	549	736	—	450	236	180
	150	6	705	559	711	914	—	610	481	370
	200	8	832	771	841	1244	—	720	810	610
	250	10	991	864	1000	1485	—	860	1680	1300
	300	12	1130	991	1146	—	1905	760	2565	2000
	350	14	1257	1067	1276	—	1981	760	3260	2900
	400	16	1384	1194	1407	—	2108	760	4540	3490
	450	18	1537	1346	1559	—	2209	860	5225	4000
	500	20	1664	1473	1686	—	2387	860	6310	4800
	600	24	1943	1943	1972	—	2794	860	9050	7500
	650	26	2033	2033	—	—	3098	1020	9934	8900
	700	28	2209	2209	—	—	3403	1020	11174	10000
	750	30	2286	2286	—	—	3746	1020	14852	13500
2500	800	32	2413	2413	—	—	3048	—	17443	16000
	900	36	2565	2565	—	—	3251	—	21246	18900
	80	3	—	368	—	596	—	450	—	135
	100	4	—	457	—	698	—	610	—	215
	150	6	—	610	—	876	—	610	—	550
	200	8	—	762	—	—	1043	610	—	900
	250	10	—	914	—	—	1170	860	—	1600
	300	12	—	1041	—	—	1322	860	—	2300
	350	14	—	1118	—	—	1379	1020	—	3200
	400	16	—	1245	—	—	1481	1020	—	4100
	450	18	—	1397	—	—	1651	1020	—	5200
	500	20	—	1397	—	—	1811	1020	—	6800
	600	24	—	1625	—	—	1905	—	—	9500
	650	26	—	1778	—	—	2032	—	—	11000
	700	28	—	1905	—	—	2108	—	—	13100
	750	30	—	2032	—	—	2362	—	—	17200
	800	32	—	2184	—	—	2463	—	—	19300
	900	36	—	2413	—	—	3063	—	—	25000